


Perma-Cal Industries
 1742 Orbit Way
 Minden, NV 89423-4114
 775 / 782-1026
 FAX 775 / 782-1056
 www.perma-cal.com



- ALL METAL POWDER COATED CASE
- ALL STAINLESS STEEL CASE AVAILABLE
- FIELD ADJUSTABLE BACK OR BOTTOM FITTING LOCATION
- FIELD CONVERTIBLE FROM NO FLANGE CONFIGURATION TO FRONT OR REAR FLANGE
- AMBIENT TEMPERATURES TO 435 °F (225 C)

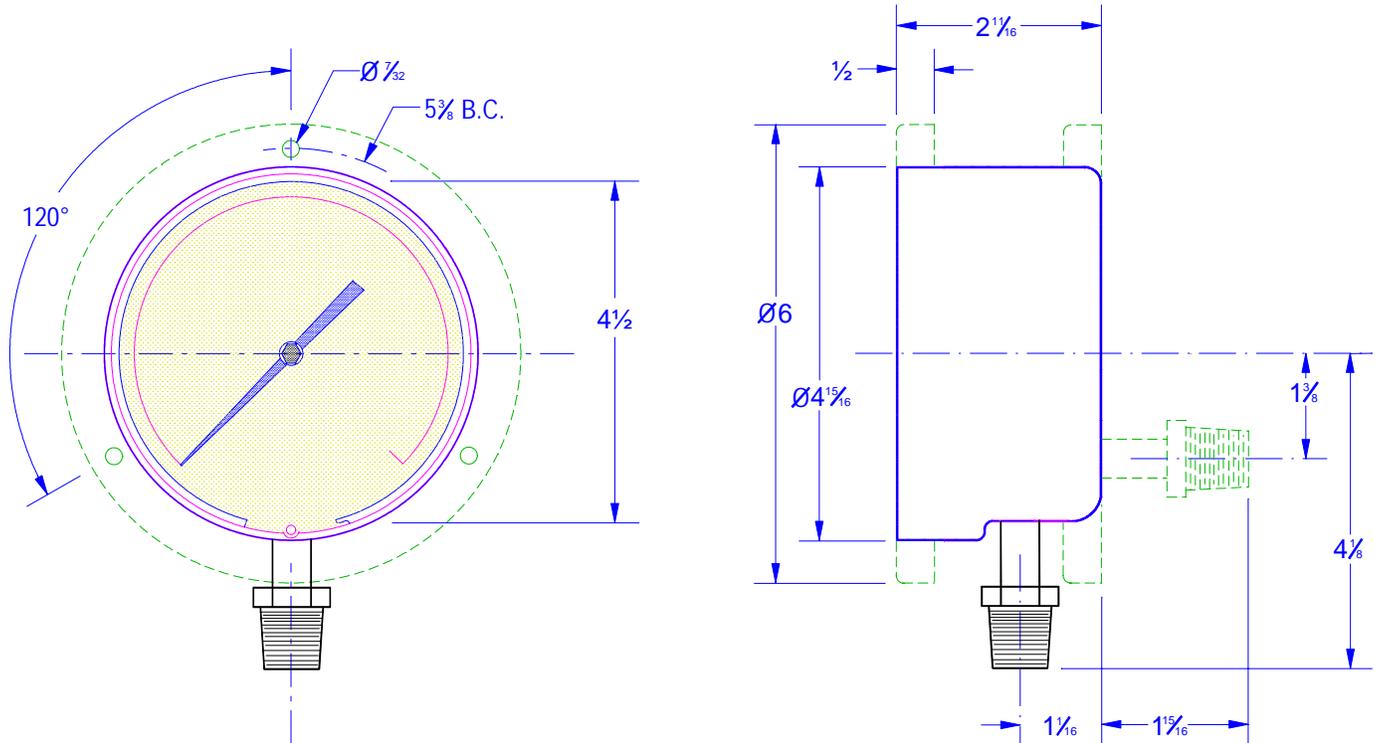

Specifications :

Pressure Range	Vacuum to 0 - 15,000 psi (see Bulletin T-103)
Accuracy	±.25% F.S. , ±.5% F.S., ±.5% M.S. ±1% F.S.
Proof Pressure (min)	150% of F.S. below 8,000 psi, 125% of F.S 8,000 psi and higher
Burst Pressure (min)	500% of F.S. or 25,000 psi whichever is less
Endurance (min)	250,000 20-80% F.S. cycles for ranges below 4,000 psi
Wetted Parts	Inconel X-750, 316SS, 304SS & Silver Braze (other options available)
Repeatability & Sensitivity	± .01% F.S.
Calibration Position	Vertical, other positions available