


Perma-Cal Industries
 1742 Orbit Way
 Minden, NV 89423-4114
 775 / 782-1026
 FAX 775 / 782-1056
 www.perma-cal.com



- ALL STAINLESS STEEL CASE
- ALL METAL POWDER COATED CASE AVAILABLE
- FIELD ADJUSTABLE BACK OR BOTTOM FITTING LOCATION
- FIELD CONVERTIBLE FROM NO FLANGE CONFIGURATION TO FRONT OR REAR FLANGE
- AMBIENT TEMPERATURES TO 435 °F (225 C)

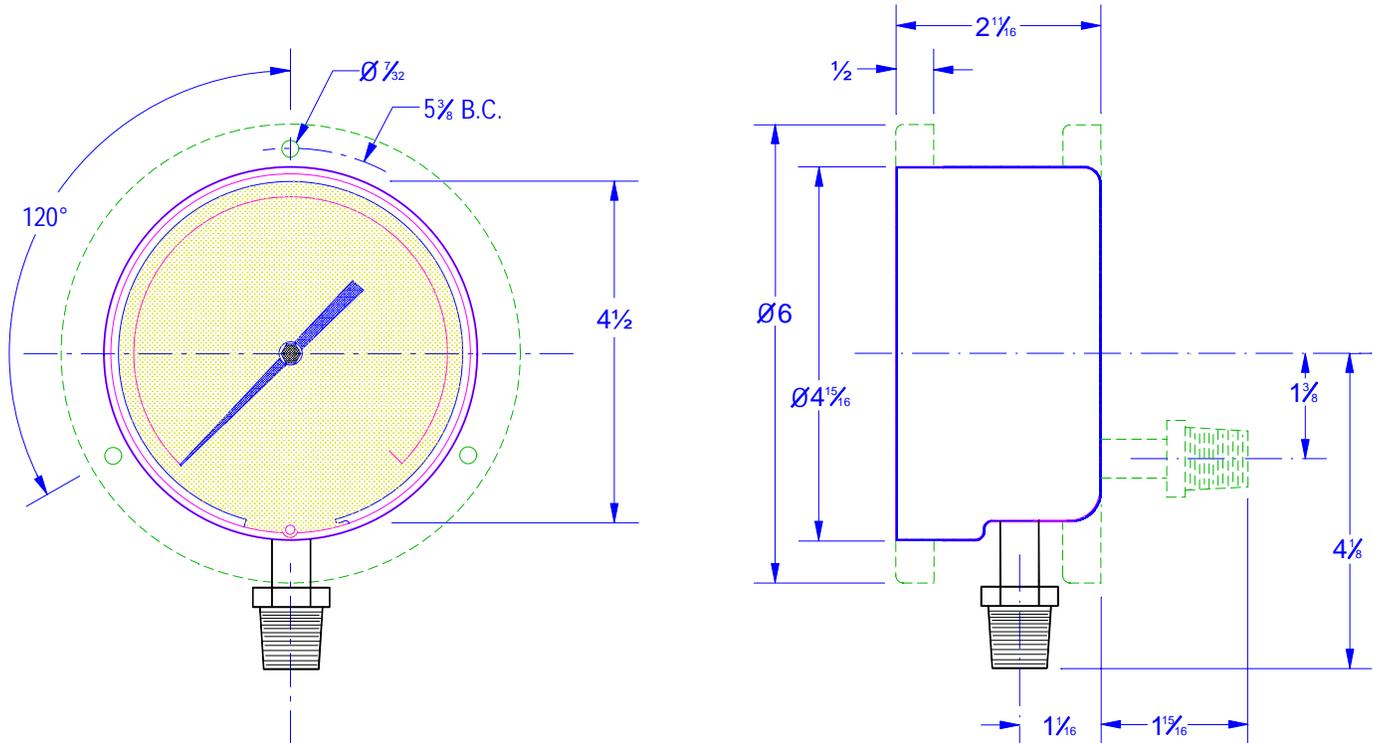

Specifications :

| | |
|-----------------------------|--|
| Pressure Range | Vacuum to 0 - 15,000 psi (see Bulletin T-103) |
| Accuracy | ±.25% F.S. , ±.5% F.S., ±.5% M.S. ±1% F.S. |
| Proof Pressure (min) | 150% of F.S. below 8,000 psi, 125% of F.S 8,000 psi and higher |
| Burst Pressure (min) | 500% of F.S. or 25,000 psi whichever is less |
| Endurance (min) | 250,000 20-80% F.S. cycles for ranges below 4,000 psi |
| Wetted Parts | Inconel X-750, 316SS, 304SS & Silver Braze (other options available) |
| Repeatability & Sensitivity | ± .01% F.S. |
| Calibration Position | Vertical, other positions available |